

PROFILE LAMINATES

We use window profile wrapping laminates from German manufacturers Hornschuch and Renolit.


These laminates provide a significant reduction in the heating build-up of the profiles in intense sunlight.

Special color pigments reflect up to 80 percent of infrared solar radiation. Thus, they reduce heating of the profile surfaces by 20 percent and more.




www.viknaland.ua

life like

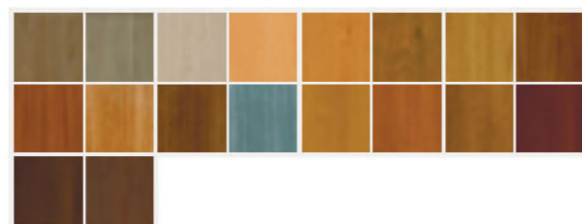

Wood Design

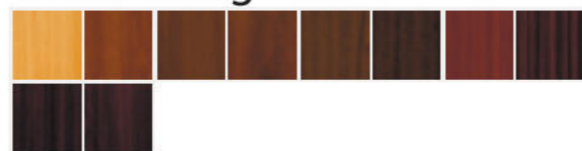

Uni



Uni matt brilliant



Uni matt



Metallic



VIKNALAND 85 Pro


CREATE COMFORT



PROFILE SYSTEM

VIKNALAND

85 Pro

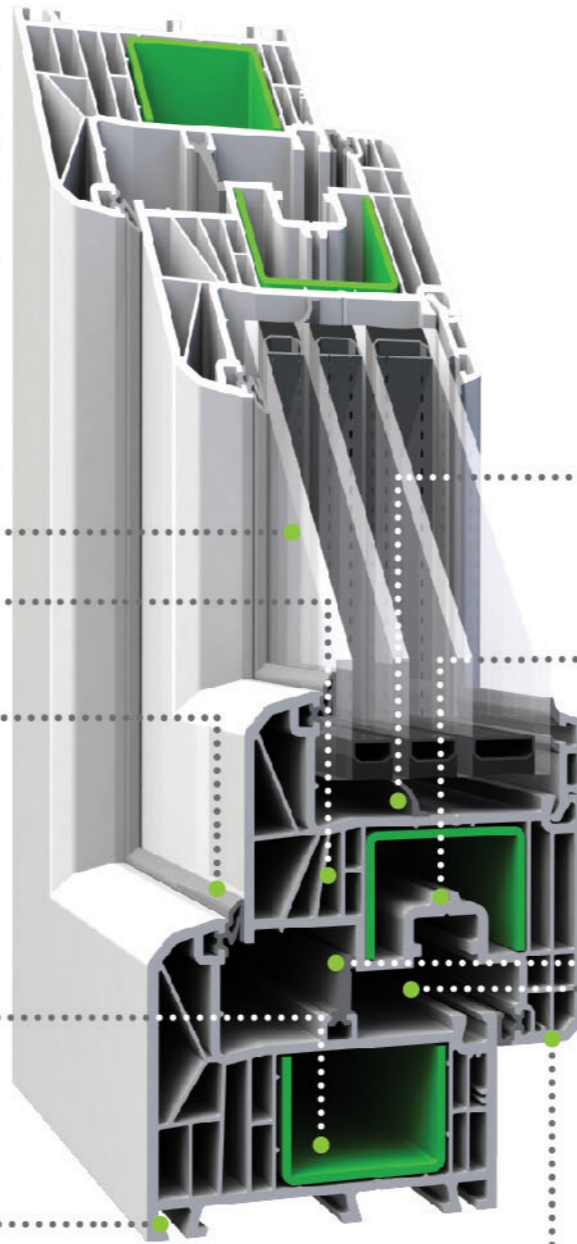

Glass units:
basic size is 48mm, other
options are 46 mm and 54 mm

01

Thermal transmittance
IFT Rosenheim
1.20 W/(m²·K)*

02

Co-extruded
soft PVC seals

03

The same steel reinforcement
is enclosed both in
windows' frame and sash

04

Installation width is 85mm
seven chambers profile
of the frame and sash

05

Sash centre
seal

06

Eurogroove
13 mm

07

Set of three seals
providing excellent
tightness


08

A closed window
has six chambers

09

Additional option
is a 45° trapezoidal sash

10

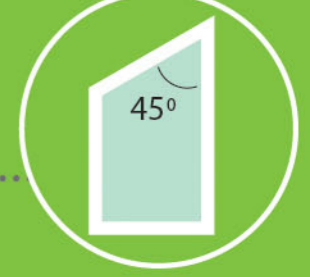

* The calculations were carried out with the steel reinforcement